WORLD INTELLECTUAL PROPERTY ORGANIZATION International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

WO 95/02724 (11) International Publication Number: (51) International Patent Classification 5: D06L 3/02, C11D 3/12, 3/39, 3/395, 7/20, A1 26 January 1995 (26.01.95) (43) International Publication Date: 7/38, 17/06 (81) Designated States: CA, CN, FI, JP, NO, US, European patent PCT/US94/07877 (21) International Application Number: 13 July 1994 (13.07.94) (22) International Filing Date:

(30) Priority Data: 14 July 1993 (14.07.93) EP 93870139.8 (34) Countries for which the regional or AT et al. international application was filed:

(71) Applicant (for all designated States except US): THE PROC-TER & GAMBLE COMPANY [US/US]; One Procter & Gamble Plaza, Cincinnati, OH 45202 (US).

(72) Inventors; and (75) Inventors/Applicants (for US only): BAILLELY, Gerard, Marcel [FR/GB]; 14 Low Gosforth Court, Gosforth, Newcastleupon-Tyne NE3 5QU (GB). FRANCE, Paul, Amaat, Raymond, G. [BE/BE]; Sint-Pieterslaan 7, B-3060 Bertem (BE). WILKINSON, Carole, Patricia, D. [GB/BE]; Rue du Prevot 95, B-1050 Ixelles (BE).

(74) Agents: REED, T., David et al.; The Procter & Gamble Company, 5299 Spring Grove Avenue, Cincinnati, OH 45217 (US).

(AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).

Published With international search report.

(54) Title: DETERGENT COMPOSITIONS CONTAINING PERCARBONATE AND MAKING PROCESSES THEREOF

(57) Abstract

A granular detergent composition comprising an alkali metal percarbonate, characterized in that percarbonate has a mean particle size of from 250 to 900 micrometers, and that said compositions comprise a hydrophobic material, selected from silica, talc, zeolite DAY and hydrotalcit, in a weight ratio of alkali metal percarbonate to hydrophobic material, of from 4:1 to 40:1, preferably 7:1 to 20:1. Both laundry detergent compositions including laundry additives and automatic dishwashing compositions are encompassed by the term "detergent composition" herein. Making processes thereof are also described.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GB	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BB	Belginn .	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	1E	Ireland	NZ	New Zealand
BJ	Beain ·	π	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgystan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic	SD	Sudan
CG	Congo		of Korea	SE	Sweden
CE	Switzerland	KR	Republic of Korea	SI	Stovenia
a	Côte d'Ivoire	KZ	Kazakhetan	SK	Słovakia
CM	Сагретосо	u	Liechtenstein	SN	Senegal
CN	China	LK	Sri Lanta	770	Chad
CS	Czechoslovakia	LU ·	Luxembourg	TG	Togo
CZ	Czoch Republic	LV	Letvia	TJ	Tajikistan
DE	Germany	MC	Monaco	17	Trinidad and Tobago
DK	Denmark	MD	Republic of Moldova	UA	Ukraine
ES	Spain ·	MG	Madagascur	US	United States of America
FI	Finland	ML	Maii	UZ	Uzbekistan
FR	France	MN	Mongolia	VN	Viet Nam
GA	Gabon		•		-

DETERGENT COMPOSITIONS CONTAINING PERCARBONATE AND MAKING PROCESSES THEREOF

Technical Field

The present invention relates to detergent compositions containing percarbonate bleach, and a hydrophobic material such as hydrophobic silica at narrowly defined ratios to provide optimum bleach stability.

The invention also encompasses processes to make such compositions.

Background of the Invention

The inorganic perhydrate bleach most widely used in laundry detergent compositions is sodium perborate in the form of either the monohydrate or tetrahydrate. However, an increased interest in other perhydrate salts is being observed, of which sodium percarbonate is the most readily available.

Detergent compositions containing sodium percarbonate are known in the art. Sodium percarbonate is an attractive perhydrate for use in detergent compositions because it dissolves readily in water, is weight efficient and, after giving up its available oxygen, provides a useful source of carbonate ions for detergency purposes.

TTU 73/04/24

The inclusion of percarbonate salts in laundry detergent compositions has been restricted hitherto by the relative instability of the bleach. In particular, percarbonate salts decompose rapidly when stored in a moist and/or warm that acceptable known It is atmosphere. obtained through the characterisitics may however be protection of the carbonate by coating the crystalline product, or by the inclusion of stabilizing agents during its manufacture, or both. A variety of suitable coating agents have been proposed including silicates and mixtures of inorganic sulphate and carbonate salts.

In WO92/06163 are described percarbonate-containing compositions wherein the Equilibrium Relative Humidity as well as the level of heavy metal ion have to be carefully controlled to ensure percarbonate stability.

There is still, however, the need to improve storage stability of the percarbonate bleach, and to achieve this in all types of detergent compositions, including compositions made by the various making processes currently available.

The Applicants have however unexpectedly discovered that when a hydrophobic material selected from silica, talcs or waxes is used into the detergent compositions, in certain ratios to percarbonate particles of a determined size, and particularly when said hydrophobic material such as silica is used as dusting agent onto said percarbonate particles prior to their incorporation into the composition, of the percarbonate is remarkably storage stability including compositions, types of all in improved, dishwashing compositions adapted for use automatic in dishwashing.

The use of silica as flow aid for detergent granules is known in the art, although the art usually does not distinguish between the different types of silica most

advantageous for this purpose; in many cases, the use of precipitated silicas which are mainly hydrophilic, are described.

JP 61 069897, laid open 10th April, 1986 states that aluminosilcate, silicon dioxide, bentonite and clay having an average particle diameter of not more than 10 micrometers can be used as a surface modifier at a level of from 0.5% to 35%; Percarbonate is merely mentioned among the bleach ingredients.

Summary of the Invention

The present invention relates to a granular detergent composition comprising an alkali metal percarbonate, characterized in that percarbonate has a mean particle size of from 250 to 900 micrometers, and that said compositions comprise a hydrophobic material selected from silica, talc, Zeolite DAY and hydrotalcit, in a weight ratio of alkali metal percarbonate to hydrophobic material of from 4:1 to 40:1, preferably 7:1 to 20:1

Both laundry detergent compositions including laundry additives and automatic dishwashing compositions are encompassed by the term "detergent composition" herein. Making processes thereof are also described.

Detailed Description of the Invention

Percarbonate

The laundry detergent or automatic dishwashing compositions herein typically contain from 1% to 40%, preferably from 3% to 30% by weight, most preferably from 5% to 25% by weight of an alkali metal percarbonate bleach in the form of particles having a mean size from 250 to 900 micrometers, preferably 500 to 700 micrometers.

Laundry additives typically contain from 20% to 80% of said percarbonate particles.

The alkali metal percarbonate bleach is usually in the form of the sodium salt. Sodium percarbonate is an addition compound having a formula corresponding to 2Na₂CO₃ 3H₂O₂. to enhance storage stability the percarbonate bleach can be coated with e.g. a further mixed salt of an alkali metal sulphate and carbonate. Such coatings together with coating processes have previously been described in GB-1,466,799, granted to Interox on 9th March 1977. The weight ratio of the mixed salt coating material to percarbonate lies in the range from 1:2000 to 1:4, more preferably from 1:99 to 1:9, and most preferably from 1:49 to 1:19. Preferably, mixed salt is of sodium sulphate and sodium carbonate which as the genral formula Na2SO4.n.Na2CO3 wherein n is from 0.1 to 3, preferably n is from 0.3 to 1.0 and most preferably n is from 0.2 to 0.5.

Other suitable coating materials are sodium silicate, of SiO2:Na2O ratio from 1.6:1 to 2.8:1, and magnesium silicate.

Commercially available carbonate/sulphate coated percarbonate bleach may include a low level of a heavy metal sequestrant such as EDTA, 1-hydroxyethylidene 1,1-diphosphonic acid (HEDP) or an aminophosphonate, that is incorporated during the manufacturing process.

Preferred heavy metal sequestrants for incorporation as described herein above include the organic phosphonates and amino alkylene poly(alkylene phosphonates) such as the alkali metal ethane 1-hydroxy diphosphonates, the nitrilo trimethylene phosphonates, the ethylene diamine tetra methylene phosphonates and the diethylene triamine penta methylene phosphonates.

Hydrophobic material

The compositions herein further comprise as an essential ingredient a selected hydrophobic material, in a weight

ratio with percarbonate of 4:1 to 40:1, preferably 7:1 to 20:1. Said material can be selected from hydrophobic silica, hydrotalcite, and zeolite DAY, and mixtures thereof.

Hydrophobic silica is the preferred material for use herein; silica is a highly dispersed amorphous silicon dioxide. It is commercially available in many forms. Most commonly silica has a tapped density of from 50 g/l to 120 g/l. The specific surface area of the particles ranges from 25 square metres per gram to 800 square metres per gram.

The surface of silica particles can be chemically modified to change their behaviour with respect to water. For example, silica particles may be treated with organosilanes to make the particles predominantly hydrophobic. It has been found that silicas must be hydrophobised to be useful in the present invention.

In commercial practice, silica is usually prepared by one of two techniques: either by precipitation or by high temperature flame hydrolysis. Precipitated silicas generally have an agglomerate size of from 3 micrometers to micrometers. fumed silicas (made by flame whereas hydrolysis) usually have primary particles which generally spherical and have an average diameter of from 7nm to 40nm. Fumed silicas having an average primary particle size of from 7 to 25 nanometers are preferred in the present invention.

Examples of silicas which are particularly useful in the present invention include those supplied by Degussa AG, Frankfurt, Germany under the Trade Name "Aerosil". Aerosil R972 has been found to be particularly useful. This silica is a hydrophobic, fumed silica which has a specific surface area of about 110 square metres per gram and an average primary particle size of 16 nanometers.

מנשטוני שלא

- Talc is a trioctahedral montmorillonoid, and is described in e.g. "An introduction to clay colloid chemistry", van Olphen, H, page 69.

Talc has the structure: Mg3Si4 O10 (OH)2

Hydrotalcite has the generalised structure:

 $M_{(k+m)}N_{(n+p)}$ (OH) $_2A_{2V-}$. xH_2O :

where M is a monolvalent or divalent cation; N is a 3+ or 4+ cation; k, m, n, p are the individual mole fractions of 1+, 2+, 3+, 4+ cations respectively, so k + m + n + p = 1 A_{ZY} is any anion of charge y- and mole fraction Z; k + 2m + 3n + 4p - zy = 0 and x = 1 to 100.

Hydrotalcites are described in e.g. EP-A-431 867 Specific examples of hydrotalcites have the structure:

Mg6 A12 (OH) 16 CO3.4H20 Mg4 A12 (OH) 12 C12.3H20 Zn4 A12 (OH) 12 (NO3) 2.xH20 Mg4 A14 (OH) y c1.35zH20 y = 16-35; z=2-5

Zeolite DAY is supplied under the trade Name "Wessalith" by Degussa.

Zeolite DAY has the following structure:

 $Na_z[AlO_2]_z.(SiO_2)_y].xH_2O$ wherein z and y are at least about 6, and z is from about 10 to about 264.

In one embodiment of the present invention, the laundry detergent compositions herein also comprise a surface-active agent and a builder.

411U 731U4144

Surface-active agent :

Anionic Surfactants

In the preferred embodiment herein, where the detergent compositions herein is a laundry detergent composition, compositions of the present invention usually contain one or more anionic surfactants as described below.

Alkyl Ester Sulfonate Surfactant

Alkyl Ester sulfonate surfactants hereof include linear esters of C₈-C₂₀ carboxylic acids (i.e. fatty acids) which are sulfonated with gaseous SO₃ according to "The Journal of the American Oil Chemists Society'" 52 (1975), pp. 323-329. Suitable starting materials would include natural fatty substances as derived from tallow, palm oil, etc.

The preferred alkyl ester sulfonate surfactant, especially for laundry applications, comprises alkyl ester sulfonate surfactants of the structural formula:

$$R^3$$
 - CH - C^0 - OR^4
 SO_3M

wherein R^3 is a C_8 - C_{20} hydrocarbyl, preferably an alkyl, or combination thereof, R^4 is a C_1 - C_6 hydrocarbyl, preferably an alkyl, or combination thereof, and M is a cation which forms a water soluble salt with the alkyl ester sulfonate. Suitable salt-forming cations include metals such as sodium, potassium, and lithium, and substituted or unsubstituted ammonium cations, such as monoethanolamine, diethanolamine, and triethanclamine. Preferably, R^3 is C_{10} - C_{16} alkyl, and R^4 is methyl, ethyl or isopropyl. Especially preferred are the methyl ester sulfonates wherein R^3 is C_{14} - C_{16} alkyl.

Alkyl Sulfate Surfactant

Alkyl sulfate surfactants hereof are water soluble salts or acids or the formula ROSO3M wherein R preferably is a $C_{10}-C_{24}$ hydrocarbyl, preferably an alkyl or hydroxyalkyl having a C_{10} - C_{20} alkyl component, more preferably a C_{12} - C_{18} alkyl or hydroxyalkyl, and M is H or a cation, e.g., an alkali metal cation (e.g., sodium, potassium, lithium), or ammonium or substituted ammonium (e.g., methyl-, dimethyl-, and trimethyl ammonium cations and quaternary ammonium cations, such as tetramethyl-ammonium and dimethyl piperdinium cations and quarternary ammonium cations derived from alkylamines such as triethylamine, and diethylamine, thereof, and the like). Typically, alkyl chains of C_{12} -16 are preferred for lower wash temperatures (e.g., below about 50°C) and C_{16-18} alkyl chains are preferred for higher wash temperatures (e.g., above about 50°C).

Alkyl Alkoxylated Sulfate Surfactant

Alkyl alkoxylated sulfate surfactants hereof are water soluble salts or acids of the formula $RO\left(A\right)_{m}SO_{3}M$ wherein R is an unsubstituted C_{10} - C_{24} alkyl or hydroxyalkyl group having a $C_{10}-C_{24}$ alkyl component, preferably a $C_{12}-C_{20}$ alkyl or hydroxyalkyl, more preferably C12-C18 alkyl or hydroxyalkyl, A is an ethoxy or propoxy unit, m is greater than zero, typically between about 0.5 and about 6, more preferably between about 0.5 and about 3, and M is H or a cation which can be, for example, a metal cation (e.g., sodium, potassium, lithium, calcium, magnesium, etc.), ammonium or substitutedammonium cation. Alkyl ethoxylated sulfates as well as alkyl propoxylated sulfates are contemplated herein. examples of substituted ammonium cations include methyl-, and quaternary dimethyl-, trimethyl-ammonium cations, such as tetramethyl-ammonium, dimethyl piperdinium and cations derived from alkanolamines such as ethylamine, diethylamine, triethylamine, mixtures thereof, and the like. Exemplary surfactants are C_{12} - C_{18} alkyl polyethoxylate (1.0) alkyl polyethoxylate sulfate, C₁₂-C₁₈E(1.0)M), C₁₂-C₁₈ $C_{12}-C_{18}E(2.25)M)$, C₁₂-C₁₈ sulfate, (2.25)polyethoxylate (3.0) sulfate $C_{12}-C_{18}E(3.0)$, and $C_{12}-C_{18}$ alkyl polyethoxylate (4.0) sulfate $C_{12}-C_{18}E(4.0)M)$, wherein M is conveniently selected from sodium and potassium.

Other Anionic Surfactants

Other anionic surfactants useful for detersive purposes can also be included in the laundry detergent compositions of the present invention. These can include salts (including; for substituted ammonium, and potassium, sodium, example, ammonium salts such as mono-, di- and triethanolamine salts) alkylbenzenesulphonates, linear C9-C20 alkanesulphonates, C8-C24 secondary primary or olefinsulphonates, sulphonated polycarboxylic acids prepared by sulphonation of the pyrolyzed product of alkaline earth described in British as citrates, e.g., C8-C24 1,082,179, No. specification alkylpolyglycolethersulfates (containing up to 10 moles of ehtylene oxide); acyl glycerol sulfonates, fatty phenol ethylene oxide alkyl sulfates, glycerol sulfates, paraffin sulfonates, alkyl phosphates, isethionates isethionates, N-acyl taurates, acyl such as the of monoesters sulfosuccinates, and succinamates sulfosuccinate (especially saturated and unsaturated $C_{12}-C_{18}$ monoesters) diesters of sulfosuccinate (especially saturated and unsaturated C_6 - C_{14} diesters), acyl sarcosinates, sulfates sulfates the as alkylpolysaccharides such alkylpolyglucoside (the nonionic nonsulfated compounds being described below), branched primary alkyl sulfates, alkyl as those of the polyethoxy carboxylates such $RO(CH_2CH_2O)_kCH_2COO-M^+$ wherein R is a C_8-C_{22} alkyl, k is an salt-forming integer from 0 to 10, and M is a soluble Resin acids and hydrogenated resin acids are also suitable, such as rosin, hydrogenated rosin, and resin acids and hydrogenated resin acids present in or derived from tall Further examples are given in "Surface Active Agents and Detergents" (Vol. I and II by Schwartz, Perry and Berch). A variety of such surfactants are also generally disclosed in U.S. Patent 3,929,678, issued December 30, 1975 to Laughlin,

et al. at Column 23, line 58 through Column 29, line 23 (herein incorporated by reference).

when included therein, the laundry detergent compositions of the present invention typically comprise from about 1 % to about 40 %, preferably from about 3 % to about 20 % by weight of such anionic surfactants.

Nonionic Surfactants

While any nonionic surfactant may be normally employed in the present invention, two families of nonionics have been particularly useful. nonionic These are found to be surfactants based on alkoxylated (especially ethoxylated) alcohols, and those nonionic surfactants based on amidation products of fatty acid esters and N-alkyl polyhydroxy amine. The amidation products of the esters and the amines are generally referred to herein as polyhydroxy fatty acid amides. Particularly useful in the present invention are mixtures comprising two or more nonionic surfactants wherein at least one nonionic surfactant is selected from each of the groups of alkoxylated alcohols and the polyhydroxy fatty acid amides.

Suitable nonionic surfactants include compounds produced by the condensation of alkylene oxide groups (hydrophilic in nature) with an organic hydrophobic compound, which may be aliphatic or alkyl aromatic in nature. The length of the polyoxyalkylene group which is condensed with any particular hydrophobic group can be readily adjusted to yield a water-soluble compound having the desired degree of balance between hydrophilic and hydrophobic elements.

Particularly preferred for use in the present invention are nonionic surfactants such as the polyethylene oxide condensates of alkyl phenols, e.g., the condensation products of alkyl phenols having an alkyl group containing from about 6 to 16 carbon atoms, in either a straight chain or branched

chain configuration, with from about 4 to 25 moles of ethylene oxide per mole of alkyl phenol.

preferred nonionics are the water-soluble condensation products of aliphatic alcohols containing from 8 to 22 carbon atoms, in either straight chain or branched configuration, with an average of up to 25 moles of ethylene oxide per more of alcohol. Particularly preferred are the condensation products of alcohols having an alkyl group containing from about 9 to 15 carbon atoms with from about 2 to 10 moles of ethylene oxide per mole of alcohol; and condensation products of propylene glycol with ethylene oxide. Most preferred are condensation products of alcohols having an alkyl group containing from about 12 to 15 carbon atoms with an average of about 3 moles of ethylene oxide per mole of alcohol.

The nonionic surfactant system can also include a polyhydroxy fatty acid amide component.

Polyhydroxy fatty acid amides may be produced by reacting a fatty acid ester and an N-alkyl polyhydroxy amine. The preferred mine for use in the present invention is N-(R1)-CH2(CH2OH)4-CH2-OH and the preferred ester is a C12-C20 fatty acid methyl ester. Most preferred is the reaction product of N-methyl glucamine with C12-C20 fatty acid methyl ester.

Methods of manufacturing polyhydroxy fatty acid amides have been described in WO 92 6073, published on 16th April, 1992. This application describes the preparation of polyhydroxy fatty acid amides in the presence of solvents. In a highly preferred embodiment of the invention N-methyl glucamine is reacted with a C12-C20 methyl ester. It also says that the formulator of granular detergent compositions may find it convenient to run the amidation reaction in the presence of solvents which comprise alkoxylated, especially ethoxylated (EO 3-8) C12-C14 alcohols (page 15, lines 22-27). This directly yields nonionic surfactant systems which are preferred in the present invention, such as those comprising

11 W 73/W4/44

N-methyl glucamide and C12-C14 alcohols with an average of 3 ethoxylate groups per molecule.

Nonionic surfactant systems, and granular detergents made from such systems have been described in WO 92 6160, published on 16th April, 1992. This application describes (example 15) a granular detergent composition prepared by fine dispersion mixing in an Eirich RV02 mixer which comprises N-methyl glucamide (10%), nonionic surfactant (10%).

Both of these patent applications describe nonionic surfactant systems together with suitable manufacturing processes for their synthesis, which have been found to be suitable for use in the present invention.

The polyhydroxy fatty acid amide may be present in compositions of the present invention at a level of from 0% to 50% by weight of the detergent component or composition, preferably from 5% to 40% by weight, even more preferably from 10% to 30% by weight.

Other Surfactants

The laundry detergent compositions of the present invention may also contain cationic, ampholytic, zwitterionic, and semi-polar surfactants, as well as nonionic surfactants other than those already described herein, including the semi-polar nonionic amine oxides described below.

Cationic detersive surfactants suitable for use in the laundry detergent compositions of the present invention are those having one long-chain hydrocarbyl group. Examples of such cationic surfactants include the ammonium surfactants such as alkyldimethylammonium halogenides, and those surfactants having the formula:

 $[R^2(0R^3)y][R^4(0R^3)y]_2R^5N+X-$

wherein R2 is an alkyl or alkyl benzyl group having from about 8 to about 18 carbon atoms in the alkyl chain, each R^3 is selected from the group consisting of $-CH_2CH_2-$,

-CH₂CH(CH₃)-, -CH₂CH(CH₂OH)-, -CH₂CH₂CH₂-, and mixtures thereof; each \mathbb{R}^4 is selected from the group consisting of \mathbb{C}_1 - \mathbb{C}_4 alkyl, \mathbb{C}_1 - \mathbb{C}_4 hydroxyalkyl, benzyl ring structures formed by joining the two \mathbb{R}^4 groups,

-CH₂COH-CHOHCOR 6 CHOHCH₂OH wherein R6 is any hexose or hexose polymer having a molecular weight less than about 1000, and hydrogen when y is not 0; R^5 is the same as R^4 or is an alkyl chain wherein the total number of carbon atoms of R^2 plus R^5 is not more than about 18; each y is from 0 to about 10 and the sum of the y values is from 0 to about 15; and X is any compatible anion.

Other cationic surfactants useful herein are also described in US Patent 4,228,044, Cambre, issued October 14, 1980, incorporated herein by reference.

When included therein, the laundry detergent compositions of the present invention typically comprise from 0 % to about 25 %, preferably form about 3 % to about 15 % by weight of such cationic surfactants.

Ampholytic surfactants are also suitable for use in the laundry detergent compositions of the present invention. These surfactants can be broadly described as aliphatic derivatives of secondary or tertiary amines, or aliphatic derivatives of heterocyclic secondary and tertiary amines in which the aliphatic radical can be straight- or branched One of the aliphatic substituents contains at least 8 carbon atoms, typically from about 8 to about 18 carbon anionic watercontains an least one and at atoms. solubilizing group e.g. carboxy, sulfonate, sulfate. U.S. Patent No. 3,929,678 to Laughlin et al., issued December 30, 1975 at column 19, lines 18-35 (herein incorporated by reference) for examples of ampholytic surfactants.

When included therein, the laundry detergent compositions of the present invention typically comprise form 0 % to about 15 %, preferably from about 1 % to about 10 % by weight of such ampholytic surfactants.

Zwitterionic surfactants are also suitable for use in laundry detergent compositions. These surfactants can be broadly described as derivatives of secondary and tertiary amines, derivates of heterocyclic secondary and tertiary amines, or derivatives of quaternary ammonium, quarternary phosphonium or tertiary sulfonium compounds. See U.S. Patent No. 3,929,678 to Laughlin et al., issued December 30, 1975 at columns 19, line 38 through column 22, line 48 (herein incorporated by reference) for examples of zwitterionic surfactants.

When included therein, the laundry detergent compositions of the present invention typically comprise form 0 % to about 15 %, preferably from about 1 % to about 10 % by weight of such zwitterionic surfactants.

Semi-polar nonionic surfactants are a special category of nonionic surfactants which include water-soluble amine oxides containing one alkyl moiety of from about 10 to about 18 carbon atoms and 2 moieties selected from the group consisting af alkyl groups and hydrocyalkyl groups containing form about 1 to about 3 carbon atoms; water-soluble phosphine oxides containing one alkyl moiety of form about 10 to about 18 carbon atoms and 2 moieties selected form the group consisting of alkyl groups and hydroxyalkyl groups containing from about 1 to about 3 carbon atoms.

Semi-polar nonionic detergent surfactants include the amine oxide surfactants having the formula:

0 R³ (OR⁴) xN (R⁵) 2

Builder

The compositions herein preferably contain a builder, most preferably non-phosphate detergent builders. These can include, but are not restricted to alkali metal carbonates, bicarbonates, silicates, aluminosilicates, carboxylates and mixtures of any of the foregoing. The builder system is present in an amount of from 25% to 80% by weight of the composition, more preferably from 30% to 60% by weight.

Suitable silicates are those having an SiO_2 : Na_2O ratio in the range from 1.6 to 3.4, the so-called amorphous silicates of SiO_2 : Na_2O ratios from 2.0 to 2.8 being preferred.

Within the silicate class, highly preferred materials are crystalline layered sodium silicates of general formula

$NaMSi_{x}O_{2x} + 1.yH2O$

wherein M is sodium or hydrogen, x is a number from 1.9 to 4 and y is a number from 0 to 20. Crystalline layered sodium silicates of this type are disclosed in EP-A-0164514 and methods for their preparation are disclosed in DE-A-3417649 and DE-A-3742043. For the purposes of the present invention, x in the general formula above has a value of 2,3 or 4 and is preferably 2. More preferably M is sodium and y is 0 and preferred examples of this formula comprise the , , These materials are available from forms of Na₂Si₂O₅. Hoechst AG FRG as respectively NaSKS-5, NaSKS-7, NaSKS-11 and NaSKS-6. The most preferred material is -Na₂Si₂O₅, NaSKS-6. Crystalline layered silicates are incorporated either as dry mixed solids, or as solid components of agglomerates with other components.

Whist a range of aluminosilicate ion exchange materials can be used, preferred sodium aluminosilicate zeolites have the unit cell formula

 $Na_z[(AlO_2)_z\cdot(SiO_2)_y]\cdot xH_2O$

wherein z and y are at least about 6, the molar ratio of z to y is from about 1.0 to about 0.4 and z is from about 10 to about 264. Amorphous hydrated aluminosilicate materials useful herein have the empirical formula

 $M_z(zAlo_2 \cdot ySio_2)$

wherein M is sodium, potassium, ammonium or substituted ammonium, z is from about 0.5 to about 2 and y is 1, said material having a magnesium ion exchange capacity of at least about 50 milligram equivalents of CaCO₃ hardness per gram of anhydrous aluminosilicate. Hydrated sodium Zeolite A with a particle size of from about 1 to 10 microns is preferred.

The aluminosilicate ion exchange builder materials herein are in hydrated form and contain from about 10% to about 28% of water by weight if crystalline, and potentially even higher amounts of water if amorphous. Highly preferred crystalline aluminosilicate ion exchange materials contain from about 18% to about 22% water in their crystal matrix. The crystalline aluminosilicate ion exchange materials are further characterized by a particle size diameter of from about 0.1 micron to about 10 microns. Amorphous materials are often smaller, e.g., down to less than about 0.01 micron. ion exchange materials have a particle size diameter of from about 0.2 micron to about 4 microns. term "particle size diameter" herein represents the average particle size diameter by weight of a given ion exchange material as determined by conventional analytical techniques such as, for example, microscopic determination utilizing a scanning electron microscope.

Aluminosilicate ion exchange materials useful in the practice of this invention are commercially available. The aluminosilicates useful in this invention can be crystalline or amorphous in structure and can be naturally occurring aluminosilicates or synthetically derived. A method for producing aluminosilicate ion exchange materials is discussed in U.S. Pat. No. 3,985,669, Krummel et al., issued Oct. 12, 1976, incorporated herein by reference. Preferred synthetic

crystalline aluminosilicate ion exchange materials useful herein are available under the designations Zeolite A, Zeolite B, Zeolite X, P and MAP, the latter species being described in EPA 384070. In an especially preferred embodiment, the crystalline aluminosilicate ion exchange material is a Zeolite A having the formula

 $Na_{12}[(AlO_2)_{12}(SiO_2)_{12}] \cdot xH_2O$

wherein x is from about 20 to about 30, especially about 27 and has a particle size generally less than about 5 microns.

Suitable carboxylate builders containing one carboxy group include lactic acid, glycollic acid and ether derivatives thereof as disclosed in Belgian Patent Nos. 831,368, 821,369 and 821,370. Polycarboxylates containing two carboxy groups include the water-soluble salts of succinic acid, malonic acid, (ethylenedioxy) diacetic acid, maleic acid, diglycollic acid, tartaric acid, tartronic acid and fumaric acid, as well ether carboxylates described in German Offenlegenschrift 2,446,686 and 2,446,687 and U.S. Patent No. 3,935,257 and the sulfinyl carboxylates described in Belgian Patent No. 840,623. Polycarboxylates containing three carboxy groups include, in particular, water-soluble citrates, aconitrates and citraconates as well as succinate derivatives such as the carboxymethyloxysuccinates described in British Patent No. 1,379,241, lactoxysuccinates described in Netherlands Application 7205873, and the oxyr lycarboxylate materials such as 2-oxa-1, 1, 3-propane tricarboxylates described in British Patent No. 1,387,447.

Polycarboxylates containing four carboxy groups include oxydisuccinates disclosed in British Patent No. 1,261,829,1, and the 1,2,2-ethane tetracarboxylates ,1,1,3,3-propane tetracarboxylates and 1,1,2,3-propane tetracarboxylates. Polycarboxylates containing sulfo substituents include the sulfosuccinate derivatives disclosed in British Patent Nos. 1,398,421 and 1,398,422 and in US Patent No. 3,936,448, and the sulfonated pyrolysed citrates described in British Patent

No. 1,082,179, while polycarboxylates containing phosphone substituents are disclosed in British Patent No. 1,439,000.

Alicyclic and heterocyclic polycarboxylates include cyclopentane-cis, cis, cis-tetracarboxylates, cyclopentadienide pentacarboxylates, 2,3,4,5-tetrahydrofuran - cis, cis, cistetracarboxylates, 2,5-tetrahydrofuran -cis- dicarboxylates, 2,2,5,5,-tetrahydrofuran - tetracarboxylates, 1,2,3,4,5,6-hexane hexacarboxylates and carbxoymethyl derivatives of polyhydric alcohols such as sorbitol, mannitol and xylitol. Aromatic polycarboxylates include mellitic acid, pyromellitic acid and the phtalic acid derivates disclosed in British Patent No. 1,425,343.

Of the above, the preferred polycarboxylates are hydroxycarboxylates containing up to three carboxy groups per molecule, more particularly citrates.

The parent acids of the monomeric or oligomeric polycarboxylate chelating agents or mixtures thereof with their salts, e.g. citric acid or citrate/citric acid mixtures are also contemplated as components of builder systems useful in the present invention.

In another embodiment of the invention, are provided Automatic Dishwashing Compositions:

Automatic dishwashing compositions typically contain, in addition to the percarbonate and hydrophobic material of the invention, a builder, such as described above, and a source of alkalinity, such as silicate or carbonate, those ingredients amounting to up to 70% of the formulation. Optional ingredients include polymers and enzymes.

In still another embodiment of the invention, are provided Laundry Additive Compositions: such compositions typically contain in addition to the percarbonate and hydrophobic material of the invention, a builder and a source of alkalinity.

TO JOINEIN

Optional Ingredients

Other ingredients which are known for use in detergent compositions may also be used as optional ingredients in the various embodiments of the present invention, such as bleach activators, other bleaching agents, polymers, enzymes, suds suppressing agents, as well as dyes, fillers, optical brighteners, pH adjusting agents, non builder alkalinity sources, enzyme stability agents, hydrotopes, perfumes.


Bleach activators

The present compositions, especially the laundry detergent compositions/additives, preferably contain from 1% to 20% by weight of the composition, preferably from 2% to 15% by weight, most preferably from 3% to 10% by weight of a peroxyacid bleach activator.

Peroxyacid bleach activators (bleach precursors) as additional bleaching components in accord with the invention can be selected from a wide range of class and are preferably those containing one or more N-or O-acyl groups.

Suitable classes include anhydrides, esters, amides, and acylated derivatives of imidazoles and oximes, and examples of useful materials within these classes are disclosed in GB-A-1586789. The most preferred classes are esters such as are disclosed in GB-A-836 988, 864,798, 1 147 871 and 2 143 231 and amides such as are disclosed in GB-A-855 735 and 1 246 338.

Particularly preferred bleach activator compounds as additional bleaching components in accord with the invention are the N-,N,N'N' tetra acetylated compounds of the formula

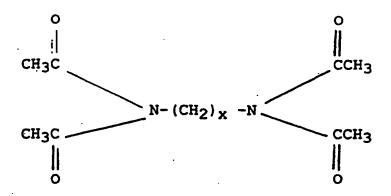

where x can be O or an integer between 1 and 6.

Examples include tetra acetyl methylene diamine (TAMD) in which x=1, tetra acetyl ethylene diamine (TAED) in which x=2 and Tetraacetyl hexylene diamine (TAHD) in which x=6. These and analogous compounds are described in GB-A-907 356. The most preferred peroxyacid bleach activator as an additional bleaching component is TAED.

Another preferred class of peroxyacid bleach compounds are the amide substituted compounds of the following general formulae:

$$R^1$$
 - $C - N-R^2$ - C - L or R^1 - N - $C-R^2$ - C - L 0 R^5 0 R^5 0

wherein R¹ is an aryl or alkaryl group with from about 1 to about 14 carbon atoms, R² is an alkylene, arylene, and alkarylene group containing from about 1 to about 14 carbon atoms, and R⁵ is H or an alkyl, aryl, or alkaryl group containing 1 to 10 carbon atoms and L can be essentially any leaving group. R¹ preferably contains from about 6 to 12 carbon atoms. R² preferably contains from about 4 to 8 carbon atoms. R¹ may be straight chain or branched alkyl, substituted aryl or alkylaryl containing branching, substitution, or both and may be sourced from either synthetic sources or natural sources including for example,

tallow fat. Analogous structural variations are permissible for R^2 . The substitution can include alkyl, aryl, halogen, nitrogen, sulphur and other typical substituent groups or organic compounds. R^5 is preferably H or methyl. R^1 and R^5 should not contain more than 18 carbon atoms total. Amide substituted bleach activator compounds of this type are described in EP-A-0170386.

In addition to percarbonate, the compositions herein may also contain another bleaching system such as perborate and activator, or a preformed organic peracid or perimidic acid, such as N,N phthaloylaminoperoxy caproic acid, 2-carboxy-phtaloylaminoperoxy caproic acid, N,N phthaloylaminoperoxy valeric acid, Nonyl amide of peroxy adipic acid, 1,12 diperoxydodecanedoic acid, Peroxybenzoic acid and ring substituted peroxybenzoic acid, Monoperoxyphtalic acid (magnesium salt, hexhydrate), Diperoxybrassylic acid.

Polymers

Also useful are various organic polymers, some of which function as builders to improve detergency. Included among such polymers may be mentioned alkyl celluloses, sodium lower carboxy-lower celluloses and sodium hydroxy-lower alkyl celluloses, such as sodium carboxymethyl cellulose, sodium methyl cellulose and sodium hydroxypropyl cellulose, polyvinyl alcohols polyvinyl acetate), often also include some (which polyacrylamides, polyacrylates and various copolymers, such as those of maleic and acrylic acids. Molecular weights for such polymers vary widely but most are within the range of 2,000 to 100,000.

Polymeric polycarboxylate builders are set forth in U.S. Patent 3,308,067, Diehl, issued March 7, 1967. Such materials include the water-soluble salts of homo-and copolymers of aliphatic carboxylic acids such as maleic

acid, itaconic acid, mesaconic acid, fumaric acid, aconitic acid, citraconic acid and methylenemalonic acid.

Other useful polymers include species known as soil release polymers, such as described in EPA 185 427 and EPA 311 342.

Enzymes

Preferred enzymatic materials include the commercially available amylases, netural and alkaline proteases, lipases, esterases, and cellulases conventionally incorporated into detergent compositions. Suitable enzymes are discussed in US Patents 3,519,570 and 3,533,139.

Preferred commercially available protease enzymes include those sold under the tradnames Alcalase and Savinase by Novo Industries A/S (Denmark) and Maxatase by International Bio-Synthetics, Inc. (The Netherlands). Preferred amylases include, for example, -amylases obtained from a special strain of B licheniforms, described in more detail in GB-1,296,839 (Novo). Preferred commercially available amylases include for example, Rapidase, sold by International Bio-Synthetics Inc. and Termamyl, sold by Novo Industries A/S.

A preferred lipase enzyme is manufactured and sold by Novo Industries A/S (Denmark) under the trade name Lipolase and mentioned along with other suitable lipases in EP-A-0258068 (Novo).

Suitable cellulases are described in e.g. WO-92/13057.

Process Details

In one process embodiment herein, the percarbonate particles are coated with the hydrophobic material herein prior to being incorporated with the remainder of the detergent ingredients to form the laundry detergent or automatic dishwashing or laundry additive compositions herein.

The percarbonate particles can optionally be first coated with a water-soluble alkali metal salt, as described above; optionally too, said coated particles can further be sprayed on with nonionic surfactant, and the hydrophobic material herein then dusted upon, to provide a final coating; This latter step can be conducted in a rotating drum, mixer, or a fluidized bed.

The liquid can be sprayed onto the percarbonate in a low shear mixer or rotating drum; the percarbonate particles are rolled within the drum/mixer in the "wet" state causing them to become sticky. Immediately afterwards, while rotating the drum, the hydrophobic material herein is slowly added to the mixer. The hydrophobic material herein coats the percarbonate and makes the particles free flowing, while protecting the percarbonate against decomposition. The invention can be practiced as a batch or continuous process. Any type of mixer may be found to be suitable for this purpose.

Still another process which is suited to the present invention is that of fluidized-bed spray. In a fluidized-bed spray process, the nonionic is sprayed into a fluidized bed of percarbonate particles. The solid particles are largely separate from one another in the fluidized bed, i.e. the fluidized state, and are therefore accessible all round to the spray drops when solution is sprayed into the bed. To obtain a fine distribution of the solution, spraying can be carried out by means of a two component nozzle. Immediately afterwards the hydrophobic material herein can be added in the fluid bed or in a rotating drum/mixer.

In a second embodiment herein, particularly suitable for making laundry detergent compositions, the hydrophobic material herein is added as part of a flow aid at a suitable time of the making process; said addition being prior or subsequent to the addition of the percarbonate to a detergent powder.

The detergent powder herein may be made by many methods which are known to the man skilled in the art including drymixing, spray drying and various types of granulation techniques, such as encapsulation, compaction, extrusion, grinding, or combinations of these techniques.

One particularly useful method of granulation is known as agglomeration. The term agglomeration is taken herein to mean the build-up of small particles to form the granular detergent having the required particle size.

Preferably, an additional step consists in spraying some or all of the nonionic surfactant on to detergent granules in one a suitable mixer or rotating drum.

The following steps may be used in a preferred embodiment of the present invention:

- i) making a granular detergent powder having a bulk density of at least 650 g/l;
- ii) spraying a nonionic surfactant on to the granular
 detergent powder of step i);
- iii) mixing the product of step ii) with a flow aid
 which comprises the hydrophobic material herein,
 wherein
 the premixed powder is used at a level of from
 3% to 15% by weight of the finished detergent
 composition.

The granular detergent powder in step i) is preferably made by agglomeration of detergent pastes, most preferably using a process of fine dispersion mixing or granulation. Even more preferably the detergent agglomerates are then dry mixed with other optional ingredients.

The process is described in more details in the Applicant's co-pending European Patent application no. 92870138.2.

Step iii) above can be conducted with any suitable means, such as rotating drums or lower shear mixers, the flow aid compositions preferably of ploughshare type.

Ploughshare mixers are available from e.g. Lödige Machinebau GmbH, Paderborn Germany, and Drain Werke GmbH, Mannheim Germany.

The flow aid contains from 0.5% to 30% of hydrophobic material preferably silica. The rest of the flow aid is typically aluminosilicate such as described above, the crystalline species being preferred, and especially partially hydrated forms of aluminosilicates, with up to 15% hydration level, being suitable.

Examples

In these examples the following abbreviations have been used:

C45AS : Sodium C14-C15 alkyl sulfate

C35AE3S : C13-C15 alkyl ethersulfate containing an

average of three ethoxy groups per mole

CMC : Sodium carboxymethyl cellulose

C25E3 : A C₁₂₋₁₅ primary alcohol condensed with an

average of 3 moles of ethylene oxide

TAED : Tetraacetyl ethylene diamine

Example I

The following granular laundry detergent composition was prepared:

	<pre>% by weight</pre>
Anionic surfactant agglomerate *	30
Layered silicate compacted granule	
(supplied by Hoechst under trade name S	SKS-6) 18
Percarbonate **	25
TAED agglomerate	9
Suds suppressor agglomerate	2
Perfume encapsulate	0.2
Granular dense soda ash	8.5
Granular acrylic-maleic copolymer	3.0
Enzymes	3.5
Granular soil release polymer	0.5

*Anionic surfactant agglomerates were made from a 78% active surfactant paste which comprises C45AS/C35AE3S in the ratio of 80:20. The paste was agglomerated with a powder mixture according to the process described in EPA510746. The resulting anionic surfactant granule had a composition of 30% C45AS, 7.5% C35AE3S, 24% zeolite, 20% carbonate, 2.5% CMC, 12% acrylic-maleic co-polymer, and the balance of moisture.

** Percarbonate coated with 2.5% carbonate/sulphate with mean particle size of 500 microns.

The mixture of granular ingredients listed above was placed inside a 140 litre rotating drum that operates at 25 rpm. While operating the drum a mixture of nonionic surfactant (C25E3) and a 20% aqueous solution of optical brightener at ratios of 14:1 were sprayed onto the granular mixture to a level of 7% by weight of the granular components. The spraying time was about 1-2 minutes.

Immediately afterwards, perfume was sprayed on, at a level of 0.5% by weight of the granular components, while rotating the drum. Then, without stopping the rotation of the drum, a flow aid was slowly added to the mixer, taking about 30 seconds. The level and type of flow aids used is given below in Table 1. Once the addition of flow aid was finished, the mixer was allowed to rotate for about 1 minute and was then stopped. The finished product was then removed from the rotating drum.

The following flow aids were prepared using Zeolite A and hydrophobic silica Aerosil R792 (Trade name) both supplied by Degussa. Mixtures were prepared in a Lödige FM130 (Trade name) by operating at 165 rpm for 0.5 minutes.

Table 1:

Flow aids	Level(%)on Finished Products	
100% Zeolite	10%	Reference Composition A
90% Zeolite + 10% Hydrophobic Silica	10%	Example 1

The compositions were stored at 35°C/80% Equilibrium Relative Humidity (eRH) in cartonboard boxes. The % percarbonate recovery was measured:

Storage	conditions	Reference	Composition	<u>A</u>	Example 1
2 weeks	35°C/80% eRH	71		80)
	35°C/80% eRH			75	
4 weeks	35°C/80% eRH	54		66	5

What is claimed is:

- 1. A granular detergent composition comprising an alkali metal percarbonate, characterized in that percarbonate has a mean particle size of from 250 to 900 micrometers, and that said compositions comprise a hydrophobic material, selected from silica, talc, zeolite DAY and hydrotalcit, in a weight ratio of alkali metal percarbonate to hydrophobic material of from 4:1 to 40:1.
- 2. A composition in accordance with claim 1 where said hydrophobic material is silica.
- 3. A composition in accordance with claim 1 wherein the weight ratio of alkali metal percarbonate to hydrophobic silica is from 7:1 to 20:1.
- 4. A composition in accordance with claims 2 and 3 wherein the hydrophobic silica is a fumed silica having an average primary particle size of from 7 to 25 nanometers.
- 5. A composition in accordance with claims 1-4 which is a laundry detergent composition containing a surface-active agent, and a builder, and has a bulk density of at least 650 g/l.
- 6. A composition in accordance with claims 1-4, which is an automatic dishwashing composition containing a builder.
- 7. A composition in accordance with claims 1-4 which is a laundry detergent additive containing from 20 to 80% of the percarbonate.

- 8. A composition in accordance with claims 1-7 wherein the alkali metal percarbonate particles are coated with the hydrophobic material.
- 9. A composition in accordance with claim 1-8 wherein the percarbonate particles are coated with a water soluble alkali metal salt, possibly further coated with nonionic surfactant, and the hydrophobic material is present at the outside layer.
- 10. A process for making a granular detergent composition according to claim 5 which comprises the steps of making a detergent powder, adding said alkali metal percarbonate, and adding a powdery flow aid containing the hydrophobic material.
- 11. A process according to claim 10 wherein the detergent powder is made by dry-mixing, spray-drying, or by a granulation process selected from encapsulation, compaction, extrusion, grinding, or a combination of these techniques.
- 12. A process for making a granular detergent composition according to claims 5, 6 and 7 wherein the alkali metal percarbonate particles are premixed with the hydrophobic material and the resulting particles are dry-mixed with the rest of the composition.
- 13. A process according to claim 12 which comprises the steps of
 - i) spraying onto the percarbonate particles a nonionic surfactant, and
 - ii) mixing the product of step i) with hydrophobic material.
- 14. A process for making a granular detergent composition according to claim 13 wherein the alkali metal

percarbonate particles used in step i) have been precoated with a water-soluble alkali metal salt.

15. A process according to claims 9-14 wherein said hydrophobic material is silica.

INTERNATIONAL SEARCH REPORT

International application No. PCT/US94/07877

A. CLASSIFICATION OF SUBJECT MATTER IPC(5) :D06L 3/02; C11D 3/12, 3/39, 3/395, 7/20, 7/38, 17/06 US CL :252/95, 174.13, 174.21, 174.25, 186.27, 186.43; 423/267, 268, 274, 275, 415.2 According to International Patent Classification (IPC) or to both national classification and IPC			
	DS SEARCHED	10 (1) (1)	
	ocumentation searched (classification system followed b	•	٠ .
	252/95, 174.13, 174.21, 174.25, 186.27, 186.43; 423/		
NONE	ion searched other than minimum documentation to the e		
Electronic d	ata base consulted during the international search (nam	e of data base and, where practicable,	search terms used) .
NONE	•		
C. DOC	UMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where app	ropriate, of the relevant passages	Relevant to claim No.
Α	US, A, 1,263,258 [LIEBKNECCHT page 1, lines 83-90.] 16 April 1918 See	1-3
Y	US, A, 2,167,997 [REICHERT] 01 / 3, Col. 1, lines 5-55.	August 1939 See Page	1-3
A	US, A, 2,625,514 [KIRSCHENBAU	ER] 13 January 1953	1-3
Y	US, A, 4,178,351 [KLEBE] 11 Dece lines 6-36.	ember 1979 See Col. 1,	1-3
Y	US, A, 4,208,295 [SAI] 17 July 44-57.	1980 See Col. 1, lines	1-3
Y	US, A, 4,444,674 [GRAY] 24 A lines10-54.	April 1984 See Col.3,	1-3
X Furt	her documents are listed in the continuation of Box C.		
• Special extraories of cited documents: Special extraories of cited documents:			
A document defining the general state of the art which is not considered principle or theory underlying the invention to be of particular relevance: *X* document of particular relevance; the claimed invention cannot be			
i	*E* earlier document published on or after the international fulls date considered novel or cannot be considered to involve an inventive step		
cited to establish the publication date of another citation or other			
special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art			
·r 40	Linear Control of the		
Date of the actual completion of the international search Date of mailing of the international search 1 1 0CT 1994			
29 SEPTEMBER 1994 I 1 1001 1331			
Name and mailing address of the ISA/US Commissioner of Patents and Trademarks Box PCT Washington, D.C. 20231 Authorized office DENNIS L. ALBRECHT			
	No. (703) 305-3230	Telephone No. (703) 308-2525	

INTERNATIONAL SEARCH REPORT

International application No. PCT/US94/07877-

Category*	egory* Citation of document, with indication, where appropriate, of the relevant passages		Relevant to claim No.	
A	US, A, 5,149,456 [CONCANNON] 22 September 19			
Y	US, A, 5,194,176 [COPENHAFER] 16 March 1993 lines 30-59.	•	1-3	
Y	JAPAN, A, 47-32200 [NIPPON] 17 August 1972 Abstract.	See the	1-3	
		•		
	·			
·				
		-		
•		•		
•		·		
	·			
		•		

INTERNATIONAL SEARCH REPORT

International application No. PCT/US94/07877

Bo	x I	Observations where certain claims were found unsearchable (Continuation of item 1 of first sheet)		
This international report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:				
1.		Claims Nos.: because they relate to subject matter not required to be searched by this Authority, namely:		
ė				
<u>2</u> .		Claims Nos.: because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:		
3.	x	Claims Nos.: 4-15 because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).		
Во	x II	Observations where unity of invention is lacking (Continuation of item 2 of first sheet)		
Thi	is Inte	ernational Scarching Authority found multiple inventions in this international application, as follows:		
1.		As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.		
2.		As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.		
3. ·		As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:		
4 .		No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:		
Rec	nark	on Protest		
		No protest accompanied the payment of additional search fees.		